


F13V Flat Nosing

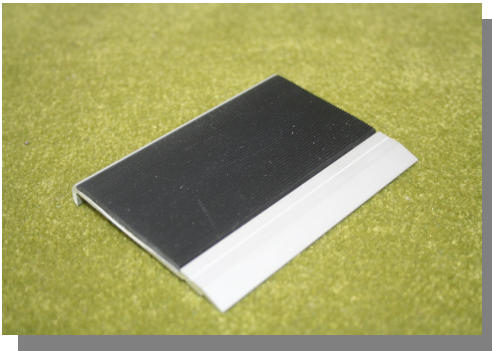

Going (width):	73.29mm
Rise (vertical):	9.63mm
Insert:	51mm

F13V NCC Code Compliant Step Nosing

The **F13V NCC Code Compliant** hard surface stair tread is a 73.29mm right angled stair nosing for fitting to the edge of hard surfaces, provided with a 51mm vinyl insert drilled and countersunk or punched @ 300mm centres. Can be glued and/or mechanically fixed.

The nosing comes in 3060mm and 3650mm lengths which can also be cut to custom lengths to suit your dimensions. Offers slip resistant protection to reduce the risk of accidents and injuries. The nosing highlights the leading edge of the stair.

The **F13V NCC Code Compliant** Step Nosing can also be fitted over steps with an industrial or commercial type carpet (with no underlay) and up to 6mm thick.

Suitable for internal applications only. The nosing can be easily retro-fitted.

The standard in-fill colour is black.

NCC Code Compliant.

BENEFITS	TECHNICAL
Built to fit onto flat steps – concrete, steel, wood, carpet, stone, tile, timber, terrazzo, vinyl. Fixed by gluing and/or mechanical fixing.	Stainless Steel Screws and plastic plugs supplied. Use polyurethane sealant, see installation instructions. Product can be drilled and countersunk or punched.
Long-lasting protection for your steps and clients. High-grade aluminium step nosing built to withstand heavy traffic.	Industrial strength anodising to > 20 micron. ASTM B 244-97 and ASTM B 137-95 (2000). 6063-T5 Aluminium. Flexible PVC Compound Grade T2/02 natural BS2782 & ASTM D2240.
Easy clean – little maintenance required. Use mop, vacuum cleaner or broom.	Passes relevant cleaning test – ASTM B 136-84 (2000) and stain test ASTM D 4828-94 (1999)