

RolaDek® Entrance Mats With EPDM Rubber Tread




JUS-2014
GECA 25-2011v2
Floor Coverings

An environmentally preferable product certified by Good Environmental Choice Services Pty Ltd to the requirements of the Environmental Choice Australia mark

RolaDek® Entrance Mats feature a sleek architectural appearance with perforated aluminium hinge construction. Perfect for use in all high traffic environments, RolaDek® Entrance Mats stand up to the debris and dirt without sacrificing aesthetics.

All RolaDek® Entrance Mats feature:-

- Easy to clean – roll back 180°.
- Custom fabrication, including angles, arcs/radii and cutouts.
- Continuous resilient vinyl cushion for superior noise reduction.
- Male and female EPDM Rubber edging for on-site trimming.
- Rolling load test to 160 kg./wheel
- Metal Coating Colours Available – Clear, Bronze, Black
- EPDM Rubber available in black.

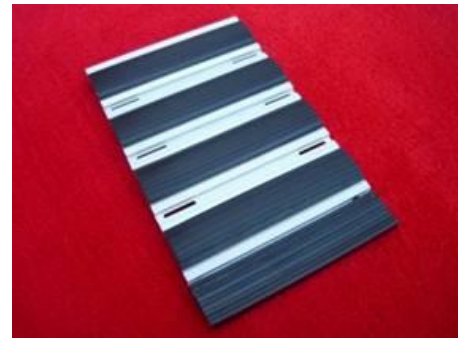

Applications for RolaDek® Entrance Mats with EPDM Rubber Tread:

- **Internal/External Use**
- **High Traffic**
- **Insert Tread: Black**
- **Suitable for: Industrial premises, factories**

Benefits and Technical Details: RolaDek® Entrance Mats with EPDM Rubber Treads meet or exceed the performance criteria specified in the following tests or standards:

- 1. Aluminium**
Aluminium RolaDek® Rail punched and anodised in clear 15um 6063-T5 Aluminium alloy.
- 2. Vinyl**
British Standard Softness – BS2782 – Value: 20±5
Shore A Hardness (10sec) ASTM D2240 - 90±
Specific Gravity – BS 2782 – 1.36
Tensile Strength – BS 2782 – MPA
Elongation at Break – BS2782
Complies with the current RoHS requirements relating to hazardous substances.
- 3. EPDM Rubber**
Specific Gravity g/cm³ - 1.219 – ASTM D297-16.3
Hardness, Shore "A" – 81 – ASTM D2240
Modulus 100% MPa – 5 – ATM D412
Tensile Strength, MPa – 11 – ASTM D412
Elongation @ Break % - 279 – ASTM D412
Tear Strength, KN/m – ASTM D624, DIE C